

6GL7

Dual Triode With High-Mu Unit and Low-Mu Unit

GENERAL DATA

Electrical:

Heater Characteristics and Ratings:

Voltage (AC or DC) 6.3 ± 0.6 volts

Current at heater volts = 6.3 1.05 amp

Peak heater-cathode voltage (Each unit):

Heater negative with respect to cathode 200 max. volts

Heater positive with respect to cathode 200^a max. volts

Direct Interelectrode Capacitances (Approx.):^b

	Unit No. 1	Unit No. 2	
Grid to plate.	4.0	8.0	pf
Grid to cathode and heater .	2.2	6.0	pf
Plate to cathode and heater.	0.6	1.3	pf

Characteristics, Class A₁ Amplifier:

	Unit No. 1		Unit No. 2		
Plate Voltage.	250	275	60	175	volts
Grid Voltage	-3	^c	0 ^d	-25	volts
Amplification Factor	66	-	-	5	
Plate Resistance (Approx.) . .	30000	-	-	780	ohms
Transconductance	2200	1600	-	6400	μ mhos
Plate Current.	2	13	100	46	ma
Grid Voltage (Approx.) for plate μ a =					
20	-5.3	-	-	-	volts
200.	-	-	-	-60	volts

Mechanical:

Operating Position Any

Type of Cathodes Coated Unipotential

Maximum Overall Length 3"

Maximum Seated Length. 2-7/16"

Maximum Diameter 1-9/32"

Bulb T9

Base Intermediate-Shell Octal 8-Pin,
(JEDEC Group 1, No. B8-6)


Basing Designation for BOTTOM VIEW 8BD

Pin 1 - Grid of Unit No. 2

Pin 2 - Plate of Unit No. 2

Pin 3 - Cathode of Unit No. 2

Pin 4 - Grid of Unit No. 1



Pin 5 - Plate of Unit No. 1

Pin 6 - Cathode of Unit No. 1

Pin 7 - Heater

Pin 8 - Heater



RADIO CORPORATION OF AMERICA
Electron Tube Division
Harrison, N. J.

DATA 1
4-63

6GL7

VERTICAL-DEFLECTION OSCILLATOR

Values are for Unit No.1

Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^e

DC PLATE VOLTAGE.	350 max.	volts
PEAK NEGATIVE-PULSE GRID VOLTAGE.	400 max.	volts
PLATE DISSIPATION	1 max.	watt

Maximum Circuit Values:

Grid-Circuit Resistance:

For fixed-bias operation.	1 max.	megohm
For cathode-bias operation.	2.2 max.	megohms

VERTICAL-DEFLECTION AMPLIFIER

Values are for Unit No.2

Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^e

DC PLATE VOLTAGE.	550 max.	volts
PEAK POSITIVE-PULSE PLATE VOLTAGE ^f	1500 max.	volts
PEAK NEGATIVE-PULSE GRID VOLTAGE.	250 max.	volts
CATHODE CURRENT:		
Peak.	175 max.	ma
Average	50 max.	ma
PLATE DISSIPATION	10 ^g max.	watts

Maximum Circuit Values:

Grid-Circuit Resistance:

For fixed-bias operation.	1 max.	megohm
For cathode-bias operation.	2.2 max.	megohms

^a The dc component must not exceed 100 volts.

^b Without external shield.

^c Adjusted for plate ma.=13.

^d Applied for short interval (two seconds maximum) so as not to damage tube.


^e As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission.

^f This rating is applicable when the duration of the voltage pulse does not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

^g In stages operating with grid-leak bias, an adequate cathode-bias resistor or other suitable means is required to protect the tube in the absence of excitation.



6GL7

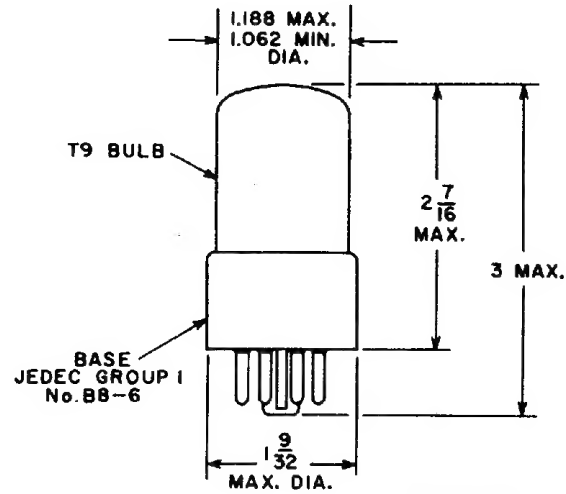

ALL DIMENSIONS IN INCHES



RADIO CORPORATION OF AMERICA
Electron Tube Division
Harrison, N. J.

DATA 2
4-63